


SPECIFICATION:

JOSAM 200C SERIES CHANNELS WITH DUCTILE IRON RAIL SHALL BE 39.4" (1000) LONG WITH 8" (203) INTERNAL WIDTH AND RADIUSED BOTTOM. INTERCONNECTING CHANNEL SECTIONS SHALL BE MADE OF SMC/GRP (SHEET MOLDING COMPOUND/GLASS REINFORCED POLYESTER) MATERIAL AND AVAILABLE WITH AND WITHOUT SLOPE. CHANNEL SUPPORT BRACKETS CAPABLE OF ACCEPTING RE-BAR, END OUTLETS, BOTTOM OUTLETS, ENDCAPS, AND CORNER/T CONNECTORS SHALL BE AVAILABLE. GRATE OPTIONS FOR LOADING CLASSES A-F WITH PRESSURE OR LOCKING BOLT SECURING DEVICES.



PRO-PLUS
8" INTERNAL WIDTH

SERIES **200C-DI RAIL**

CHANNEL NUMBER + 152442P	DIM "A"	DIM "B"	WEIGHT (LBS)
200C	10.7	10.7	30.5
200C01	12.0	12.2	33.7
200C02	12.2	12.4	33.9
200C03	12.4	12.6	34.1
200C04	12.6	12.8	34.2
200C05	12.8	13.0	34.4
200C05N	13.0	13.0	34.6
200C06	13.0	13.2	34.7
200C07	13.2	13.4	34.9
200C08	13.4	13.6	35.1
200C09	13.6	13.8	35.3
200C10	13.8	14.0	35.5
200C11	14.0	14.2	38.6
200C12	14.2	14.4	38.8
200C13	14.4	14.6	39.0
200C14	14.6	14.8	39.1
200C15	14.8	15.0	39.3
200C15N	15.0	15.0	39.5
200C16	15.0	15.2	39.6
200C17	15.2	15.4	39.8
200C18	15.4	15.6	40.0
200C19	15.6	15.8	40.2
200C20	15.8	16.0	40.4

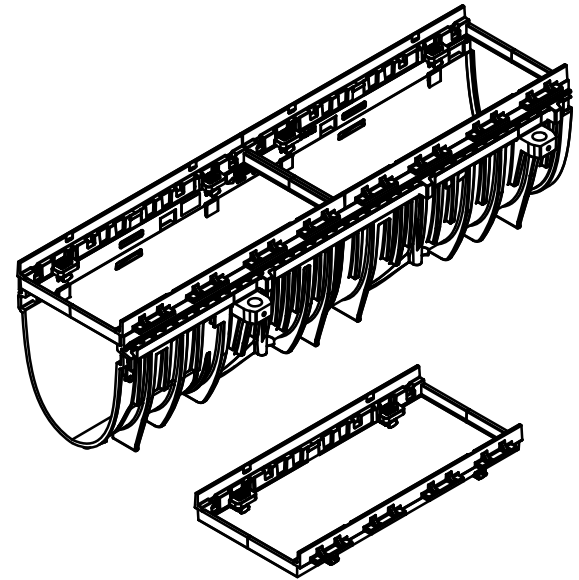

152442P DUCTILE IRON FRAME ONLY

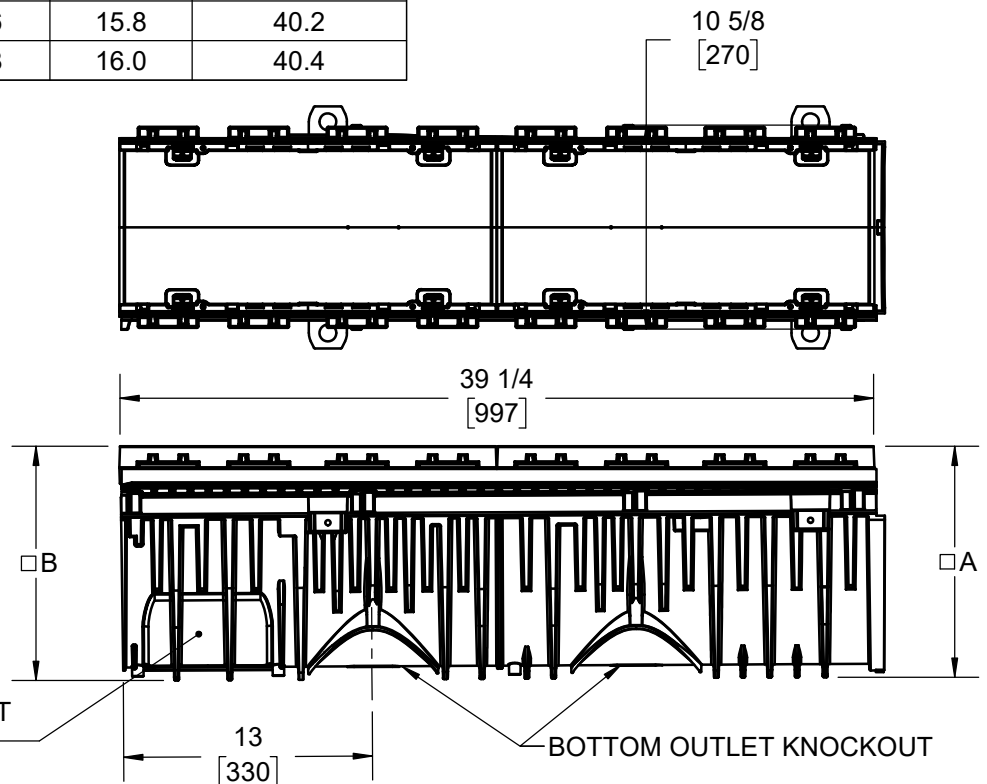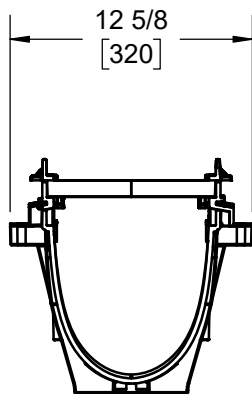

SIDE OUTLET KNOCKOUT

BOTTOM OUTLET KNOCKOUT

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 06/15/21

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

JOSAM
MICHIGAN CITY, INDIANA

NOTES